




ROGUE VALLEY  
SEWER SERVICES  
138 WEST WILAS ROAD  
CENTRAL POINT, OR.

SEPTIC TANK EFFLUENT PUMP  
INSTALLATION

Rev. 9/14

STANDARD  
DRAWING  
NO. 11-3  
DATE: 9/07

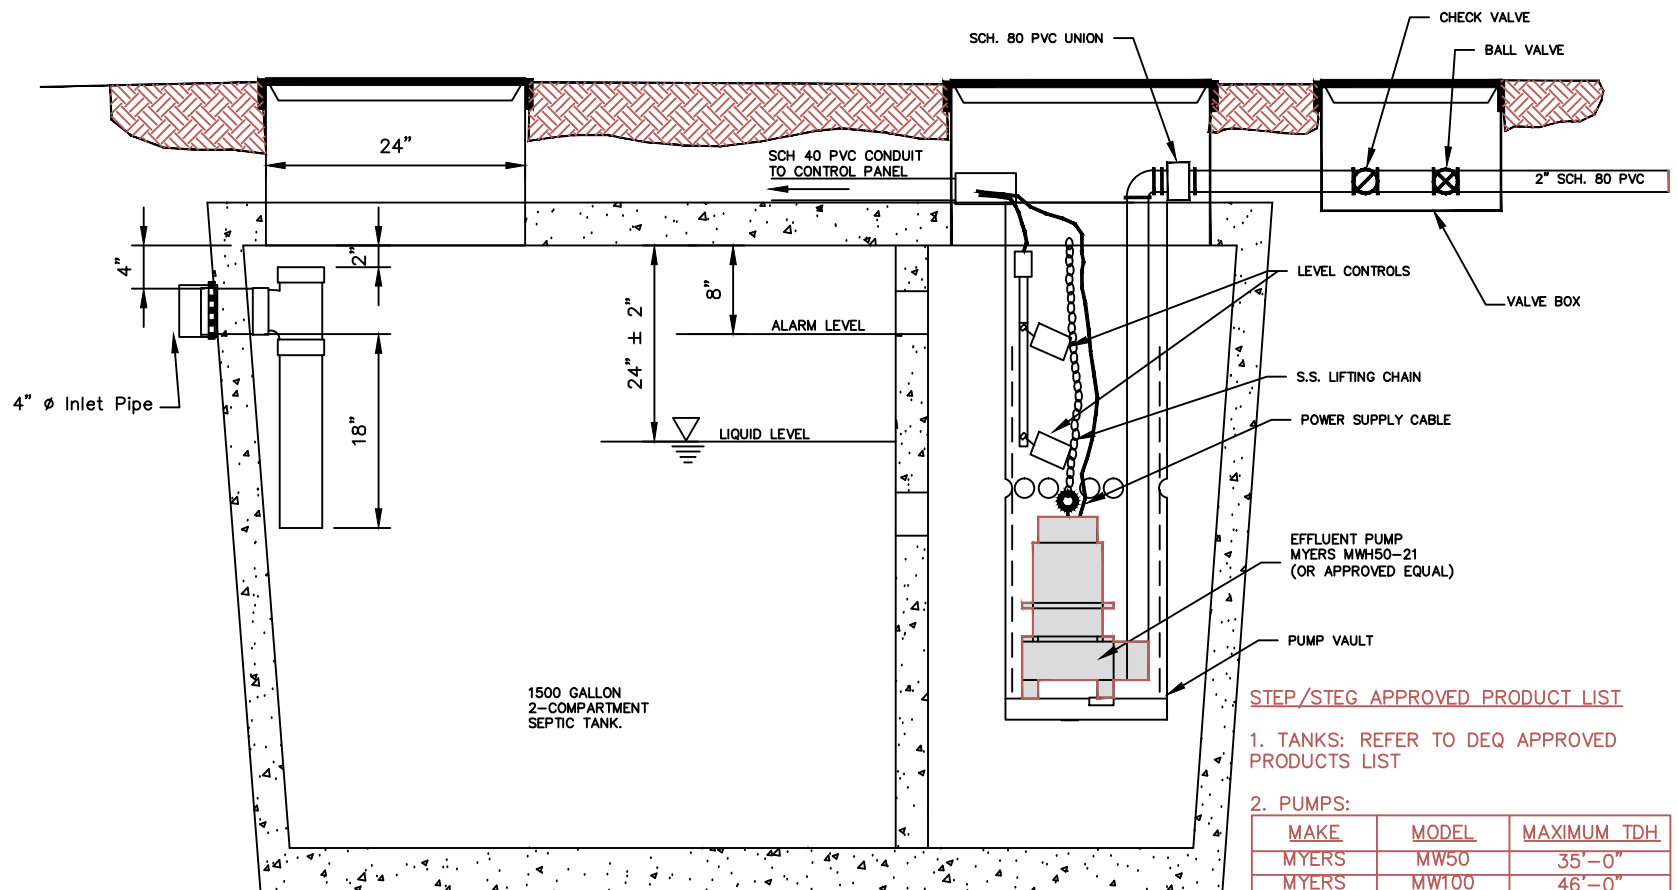

SEPTIC TANK EFFLUENT PUMP INSTALLATION

STEP/STEG APPROVED PRODUCT LIST

1. TANKS: REFER TO DEQ APPROVED PRODUCTS LIST

2. PUMPS:

MAKE	MODEL	MAXIMUM TDH
MYERS	MW50	35'-0"
MYERS	MW100	46'-0"
MYERS	MW150	57'-0"
MYERS	WHR5-DS	23'-0"
MYERS	WHR7-DS	26'-0"
MYERS	WHR10-DS	32'-0"
AURORA	SHEF33	34'-0"
AURORA	SHEF50	62'-0"
AURORA	SHEF100	90'-0"
ORENCO	PF1010	250'-0"
ORENCO	PF1007	225'-0"
ORENCO	PF1005	170'-0"
ORENCO	PF1005 tc	90'-0"

3. CONTROL/ALARM PANEL

ORENCO MODEL S1-ETM.CT (115 VOLT AC)

ORENCO MODEL S2-ETM.CT (230 VOLT AC)

NOTE: INSTALL CONTROL BOX WITH POWER SHUTOFF SWITCH WITHIN +/- 10 FEET OF TANK