INSTALL WATER SUPPLY FOR FLUSHING,
WITH REDUCED PRESSURE BACKFLOW
PREVENTION DEVICE DOWNSTREAM FROM
LAST SHUT OFF VALVE A MIN. 2'x2'
SIGN POSTED NEXT TO WATER SUPPLY
SHALL READ:

DANGER - NOT TO BE USED FOR
DRINKING OR DOMESTIC PURPOSES

SIGN

SNAP-ON FITTINGS, NO
HOSE THAT COULD CAUSE
CROSS CONNECTIONS

3' MIN.

3' MIN.

INSTALL VENT PIPE
SECURED TO TREATED
POST OR BUILDING

PLAN
NO SCALE

INSTALL VENT PIPE
SECURED TO TREATED
POST OR BUILDING
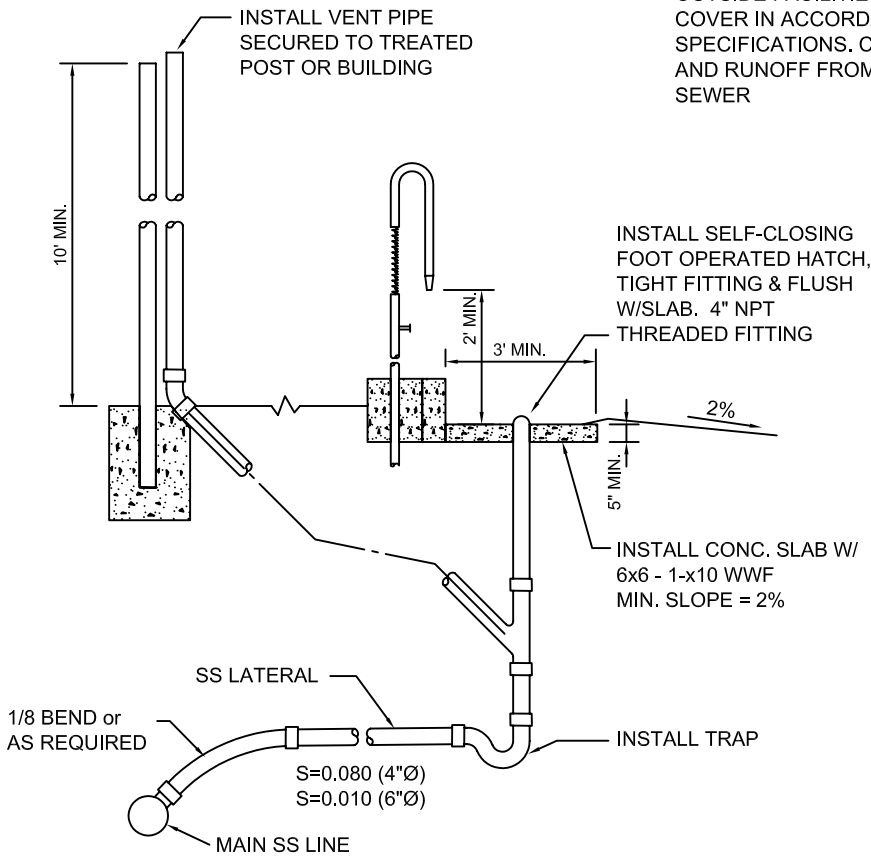
OUTSIDE FACILITIES REQUIRE A PERMAMENT
COVER IN ACCORDANCE WITH THE UBC,& UPC
SPECIFICATIONS. COVER TO EXCLUDE RAINFALL
AND RUNOFF FROM ENTERING SANITARY
SEWER

10' MIN.

INSTALL SELF-CLOSING
FOOT OPERATED HATCH,
TIGHT FITTING & FLUSH
W/SLAB. 4" NPT
THREADED FITTING

2' MIN.

3' MIN.

2%

5" MIN.

INSTALL CONC. SLAB W/
6x6 - 1-x10 WWF
MIN. SLOPE = 2%

SS LATERAL

1/8 BEND or
AS REQUIRED

S=0.080 (4"Ø)
S=0.010 (6"Ø)

INSTALL TRAP

MAIN SS LINE

SECTION
NO SCALE